


# LED Street light Instruction


## ❖ Technique Parameter

- Output Voltage : AC 85V ~ 265V 50/60Hz, overvoltage is dangerous.
- Lamp surface is glass. Don't be extrusion during restore and carry.
- Certificate: IP65、CE、ROHS BIS

## ❖ Wiring Diagram

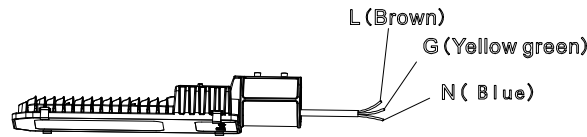

## ❖ Installation Diagram:

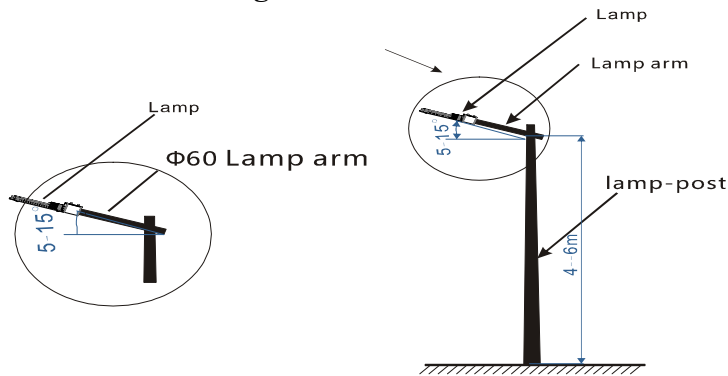

- Blackout before installation. Don't install it with electricity.
- Adjust the suitable angle.
- Unscrew the screw by the 8mm Sockets wrench, until the pole can insert the lamp head and through the connection, then fasten the screw.

- Connect the wire. It's 0.75MM<sup>2</sup> triple-core, brown is firing line, blue is zero line, yellow green is ground line.
- Don't try to install the damaged product.
- Don't install the lamp in the inclosed place in order to good heat dissipation effect.
- Make sure the wire connection is good and safe to avoid electric leakage after installing the lamp.
- Waterproof measure must be taken when connecting the driver.
- Don't violate the law of fire control when using the lamp.

## Maintenance Instruction

- Product guarantee 2 years, the manufacturer will be responsible for the quality during the period. The damage resulted of irresistible clause will have paid maintenance.
- Turn off the driver when maintaining the lamp.
- Regularly Clean the dust on the heat sink in order to good eat dissipation effect.
- Don't use the chemical or corrosive liquid to clean the lamp. Please use dry cloth to clean it.
- Please contact with the dealer and manufacturer if the LED chip or driver has to be replaced. Because the waterproof and dustproof performance will be effected after dismounting again.